


HR-1030 High Power RF Module

User Manual

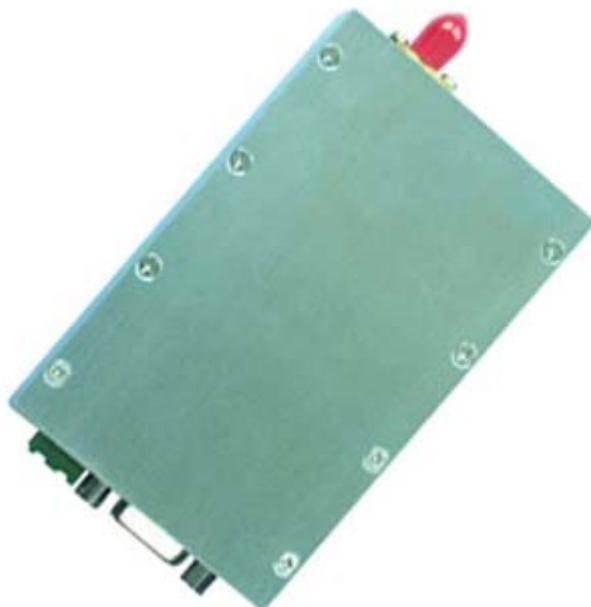

ORIENTAL HUARAY GROUP LIMITED

Tel: 86 755 81782516 Cell phone: 86 15813856667 Fax: 86 755 81782518

Address: Huaxia Industrial park, Jingbei, Shiyan, BaoAn district, Shenzhen, China Postal code: 518108

Website: www.ohgrf.com E-mail: sales@ohgrf.com or jet.zhang8@gmail.com

Dear clients:

Thank you for using the product of HR-1030, in order to use this product more fast and effective, please read the user manual of HR-1030 Module carefully before using the product. Our products have many function and simple interface, so that can meet clients' many requirements. Any question in technical, you can contact us. Tel: +86-755 81782516 Cell: 86 15813856667

I: About HR-1030

HR-1030, the high speed data radio is designed to be Long distance and high performance wireless data radio modem. The new design makes the modem more flexible for different application in various configurations. Basically, this type of modem is SMART enough to be customized to best meet end user's requirements. It has a small volume, metal shell, high shield performance and high anti-jamming

performance. It adopts integration power set free and TXCO and so on high reliability parts. It adopts GFSK modulation, so it enhances the using rate of the frequency resource and the anti-jamming performance.

Besides, it is the half-duplex communication way so it is very convenient for clients to provide bidirectional data signal transmission, checking and controlling. It is less than 18mS between transmitting and receiving.

It apply to wireless data collection, controlling in industry and oil field, water measure and so on important application.

II: Features:

1. Power and sensitivity

Ultra high speed power transmission with 5W, 10W as maximal transmission power. High sensitivity -123dbm(1200bps); -118dbm(9600bps)。

2. ISM frequency band with no require of applying frequency:

With 400-470MHz as carrier frequency, it is available for 315/868/915MHz, customers can also choose high frequency 1.2Ghz and 2.4Ghz, 4.8Ghz frequency.

3. High anti- interference and low BER(Bit error Rate)

Based on the Gaussian Frequency Shift Keying(GFSK) modulation, the high-efficiency forward error correction channel encoding technology is used to enhance data's resistance to both transient interference and random interference and the actual bit error rate of $10^{-5} \sim 10^{-6}$ can be achieved when channel bit error rate is 10^{-2} .

4. Long transmission distance

Within the visible range, the reliable transmission distance is $>8\text{km}$ (BER= $10^{-5}/9600\text{bps}$), and $>12\text{km}$ (BER= $10^{-5}/1200\text{bps}$)using the big osculum antenna.

5. Transparent data interface

Transparent data interface is offered to meet any standard or nonstandard user protocol. Any false data generated in the air can be filtrated automatically (What has been received is exactly what has been transmitted). The change time between receiving and sending is $<10\text{ms}$.

6. Multi- channel and baud rate

The standard HR-1030 configuration provides 8 channels, also it can be extended to 16/32 interface, to satisfy user' demand.

7. Large data buffer area

With optional interface baud rate: 1200/2400/4800/9600/19200/38400bps and 8N1/8E1 data format(set by user),the transceiver can transmit unlimited data frames with flexible user program.

8. Intelligent data control and no any extra programs required

Even for half duplex communication, the user doesn't need to prepare excessive programs, only receiving/transmitting the data from the interface. HR-1030 will complete the other operations automatically, such as transmission/receiving conversion in the air, control, etc.

9. 2 ports with three connection methods

HR-1030 transceivers provide 2 ports with three connection, ports: a UART interface of TTL level, a non-standard RS-232 port and a non-standard RS-485 port, which both are defined by user software (define it just by plugging out and in one short circuit device and then power on)

10. High reliability, small and light

Aluminium metal shield shell , small volume: 85mm×58mm×16mm(without the antenna port)

III: Application of HR-1030:

HR-1030 High speed data radio module is suitable for:

- * AMR Automatic Meter Reading
- * Wireless alarm and security systems
- * Building automation, security, wireless monitoring and control of room equipment, Access Control System;
- * Wireless data transmission, automatic data collection system;
- * Low power telemetry
- * 433 / 868 and 915 MHz ISM/SRD band systems
- * Data radio can be used for Wireless conference voting system;
- * Mapping;
- * Radio modem can be used for Sports training & competition;
- * Wireless dishes ordering;
- * Wireless POS, PDA wireless smart terminal;
- * RF modem can be used for Electronic bus station and intelligent traffic;
- * RF transmitter Wireless electronic display screen and queuing machine;
- * Wireless telemetry Charging for parking, parking lot;
- * Wireless modem Automobile inspection and four-wheel orientation;
- * Wireless sensor Industrial wireless remote control and air conditioning remote controller;
- * Data communication used for railway, oil field, dock and army.
- * LED display in thruway and public places
- * Wireless RS232/RS485 conversion/connector;

- * Point to multi-point wireless network, wireless on-the-spot bus and automatic data collection system;
- * wireless data collection, controlling in industry and oil field, water measure and so on.

IV: How to use the HR-1030 High Speed Data Radio

Module:

HR-1030 provide RS-232, RS-485 and UART/TTL level interface port for direct connection with PC, RS485 devices, monolithic processors and other UART components kinds of applications.

1. Power supply

HR-1030 work with supply voltage +12VDC. By using better ripple factor, HR-1030 transceivers can also share power supply with other equipment. If possible, a voltage-stabilizing chip with 12V voltage is more recommended as the only power supply than switch power supply. But if only switch power supply available, the jam by switch pulse to the transceivers should be avoided. In addition, the reliable grounding must be used if there is other device in the system equipment. In case of failing to connect with the ground, it can form its own grounding but must be absolutely separated from the municipal electric supply. If lower power for lower power consumption needed, we can design to meet users' demands.

2. Connection Definition with terminal


HR-1030 transceivers supply one 9-pin connector(JP1),their definitions and connection methods with terminals are shown in Table 1.

Table 1: JP1 Pin Definitions and connection methods

Pin No.	Signal Name	Function	Level	Connection with terminal	Remarks
1	GND	Grounding of power supply		Ground	
2	A(TXD)	A of RS-485(TxD of RS-232)			
3	B (RXD)	B of RS-485(RxD of RS-232)			
4	NC				
5	DGND	Signal			
6	RXD/TTL	Received data input of the transceiver		TTL	
7	TXD/TTL	Transmitted data out of the transceiver)		TTL	
8	SLEEP	Sleep control (input)	TTL	Sleep signal	low level sleep

9	TEST	Inside control(input)			
---	------	-----------------------	--	--	--

3. The connection schematic diagram about the HR-1030

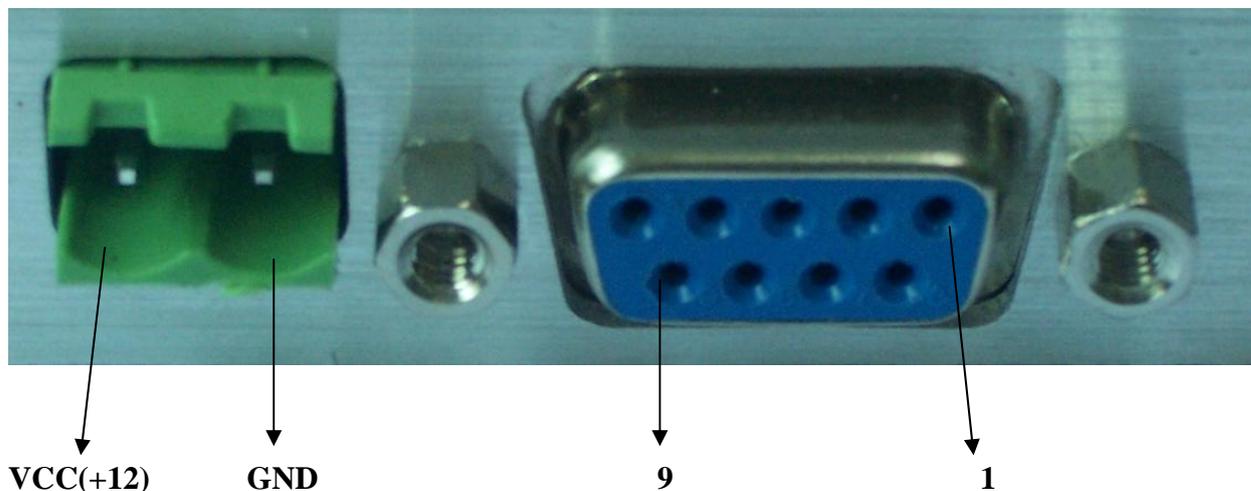

4. Setting of channel, interface, and data format


Before using HR-1030, the user needs to make simple configuration based on its own needs to determine the channel, interface mode and data format.

The user can change or view the module's interface baud rate, channel and address code. Parameter setting or reading as per the testing software HRPRO.exe in the PC (in products box). And the configuration is as follows:


- i. The schematic diagram of setting the parameter as follows:
 - a. Connect the PC and module with data line
 - b. Double-click the “HRPRO.EXE” PC software, then select “English” as follows:



- c. Click “open port” of the submenu in the “Edit” of the main menu, it will appear the picture as follows, then user can set parameter through the small window.

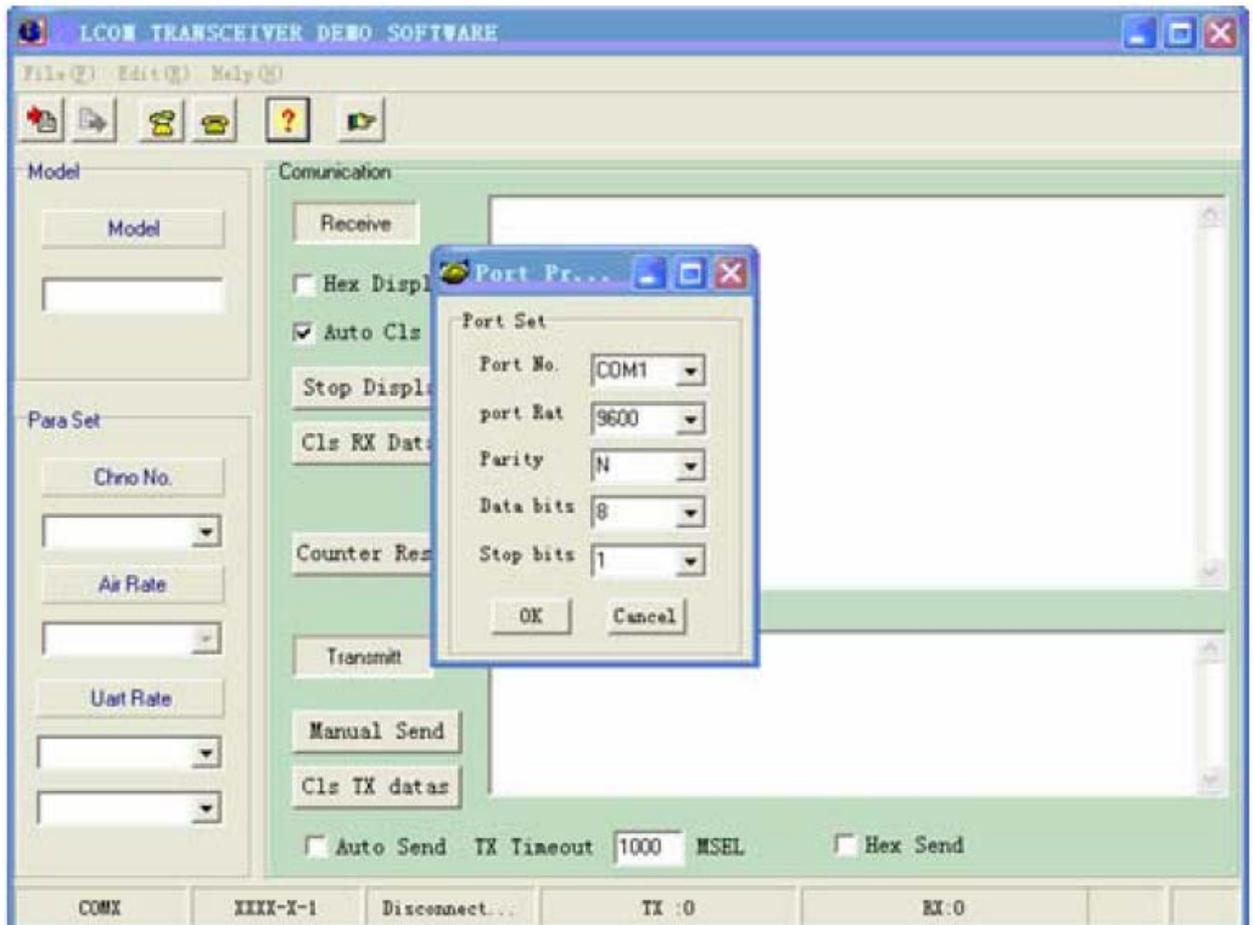


- d. Click “read paras” of the submenu in “File” of the main menu. It is a process to read data. During this process, the red indicator light of the module will glitter, when have checked out the transceiver, there will be clewed as “Read correct”, at the same time, the red indicator light will stop glittering. And there will display the current parameter of the RF module at the left window. The diagram as follows

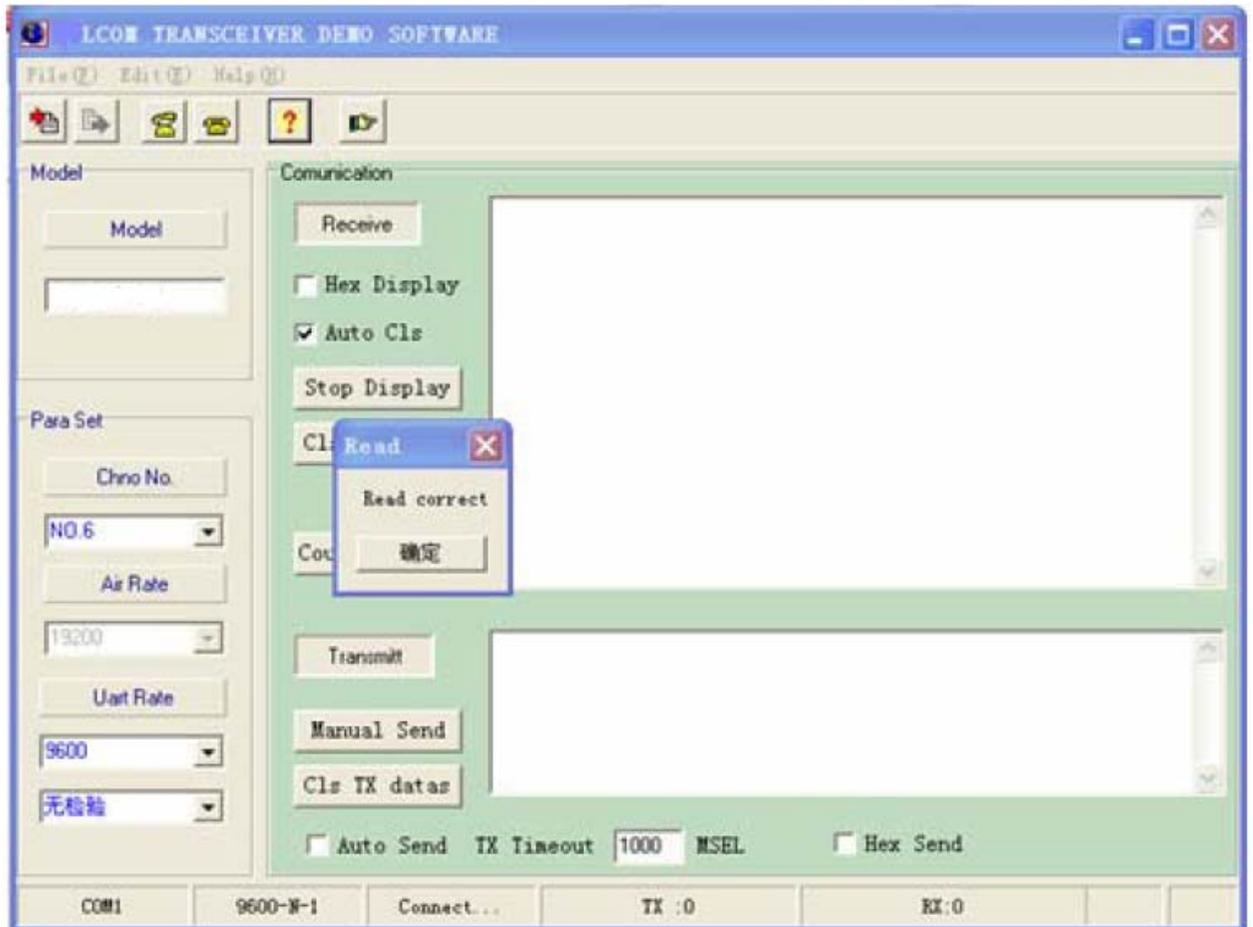

- e. User can modify the parameter such as channel and interface rate according to actual demand through the button of the left window. After modifying click “write paras” of the submenu in “File” of the main menu, then there will clew “write correct”. At the same, the current parameter will be saved.

The diagram as follows:

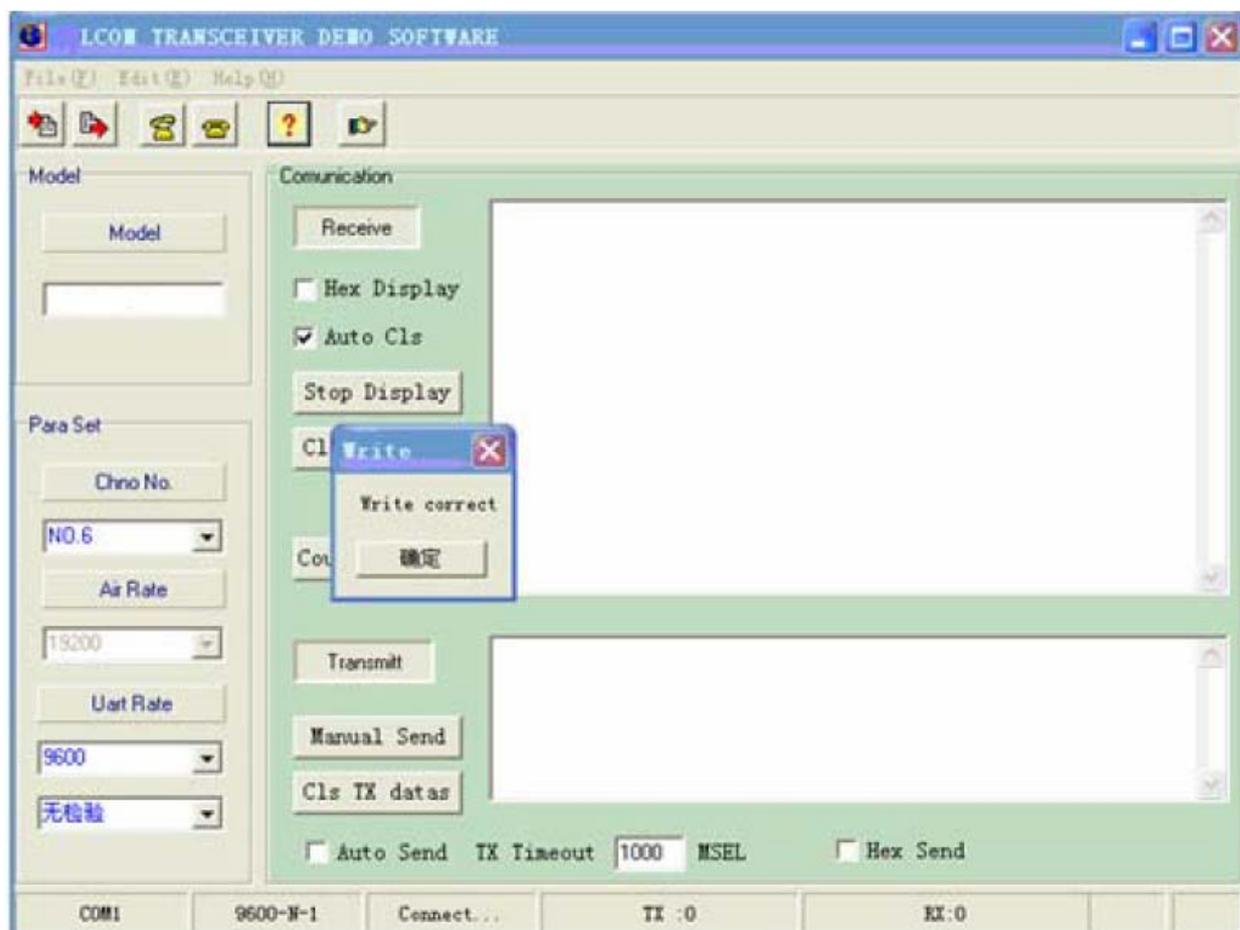

5. Supported protocol and Transmit capability

HR-1030 standard transceiver offer transparent protocol to support various applications and protocols of users. If the user needs to decrease his cost or ease the workload of terminal CPU, we can add other specific functions based on the transparent protocol, such as addressing, data acquisition, command interpretation, etc.

As using FIFO mode, HR-1030 is able to satisfy user big data package transmission.

6. Description of Indicator light

- The red and green lights are on about 500Ms at the same time after supplying the electricity.
- The red light is normally on when transmitting data, while the red light will crush out after ending the data.
- The green light is normally on when receiving the air signal, while the green light will crush out after receiving the air signal.


7. Sleep function instruction:

Due to reducing more consumption, HR-1030 transceivers support Sleep function. In sleep mode, the current consumption is <math><1\text{mA}</math>.

The default set of sleep function is usually closed to ensure the reliability of preventing transceivers from getting in wrong sleep mode. The sleep function can be opened by HR after informed or by user via programming them software.

a. How to use the sleep function:

The Sleep Timing diagram:

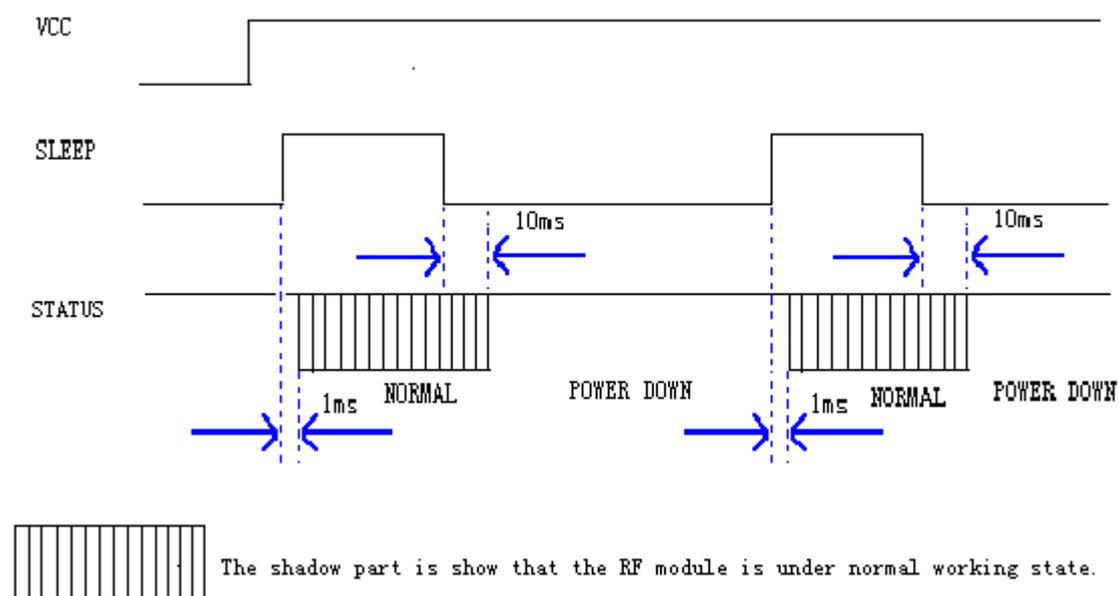

NOTICE:

The Pin8”SLP” in JP1 is the signal of sleep control. In high power level, when the transceivers stays in sleep mode, the conversion from idle mode to sleep will be finished in 1ms(It is means that the delay time(tc) of conversion between transmitting and receiving is less than 1Ms).The SLP signal can convert transceiver from idle to sleep mode in 1ms after rising edge. If the sleep signal arrives when the transceiver is transmitting data, the module will enter sleep mode after finishing transmission. From sleep mode to idle, it takes the transceiver 10ms after falling edge.

b. Attentions about use of sleep function:

When the sleep function enabled, any supply glitches, such as switch dithering, fire striking or quick switching on and off, could cause the transceiver to be switched to the wrong sleep mode. After switching on, users can avoid this error by making a compulsive restoration once after the CPU delays 150ms.

9. Standard configuration and Antenna configuration

i: Standard configuration:

- * One HR-1030 RF module
- * A RS-232 data Connection Line
- * A small osculum antenna (about 15cm)
- * A power supply line

ii: Antenna configuration:

Many appropriate antennas for low power RF modules are selected for meeting different user antenna configuration. Please ask our Sales office for further information about the antenna's dimension and performance. The main options of antennas are exterior flagelliform rubber antenna with helical SMA joint, small osculum antenna, small rod antenna and elbow antenna. If the user has special demands on antennas, we can design and produce for them specially.

a. Small osculum antenna



b. Big osculum antenna



c. Glass steel antenna

V. Application of HR-1030 Networking

The communication channel of HR-1030 is half duplex, which is most suitable for the communication mode of point to multi-point. Under this mode, one master station must be set, and all of the rest are slave stations. A unique address is given to each station. The coordination of communication is controlled by master station that uses data frames containing address code to transmit data or command. Slave station will receive all of the data and command and compare the received address code with local address code. If they are different, the data will be deserted without any response. If those address codes are the same, it means the data is sent to the local. Slave station will make different responses according to the transmitted data or command and send back the data of response. All these jobs must be performed by upper protocol, and it is assured that there is only one transmitter-receiver in the state of transmission in the communication network at any instant moment so as to avoid the cross-interference.

HR-1030 can also be used for point-to- point communication with easier operation. For the programming of serial port, all you have to do is to remember that its communication mode is semi duplex while always observing the time sequence of come-and-go for receiving and transmitting.

VI. Technical specification of HR-1030

- * Modulation mode: GFSK/FSK
 - * Working frequency: 400MHz/420MHz/450MHz
 - * Power supply: DC 12V ($\pm 10\%$)
 - * RF power: $\leq 5W$ or 10W (optional);
 - * Interface data rate: 1200/2400/4800/9600/19200bps
- Set before delivery;
- * Receive current: $< 30mA$ (TTL connect)
 - * Receive sensitivity: -123dBm (1200bps); -118dBm (9600bps)
 - * Transmitting current: $< 1.5A$;
 - * Sleep current: $< 1mA$;

- * Interface data format: 8E1/8N1/8O1
- * Working humidity: 10%~90%relative humidity without condensation
- * Working temperature: -35°C~+75°C(industrial)
- * RF Line-of-sight Range: 8km(BER=10-5@9600bps);
12km(BER=10-5@1200bps);
- * Size: 85mm*58mm*16mm (without antenna port).